

## TECHNICAL DATA SHEET

# DOUBLE SIDED TISSUE TAPE

## PSA150 FDA



### MATERIAL


Food grade acrylic tissue tape on a white release liner

### AVAILABLE GRADES

PSA150FDA

### TEMPERATURE

## Temperature Range

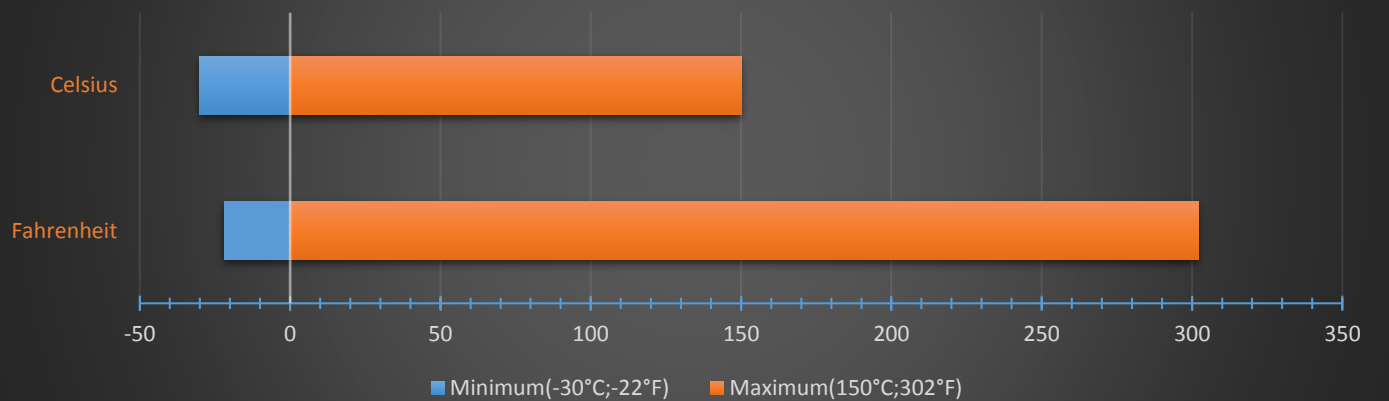

Recommended application temperature: 5°C (41°F) to 60°C (140°F)

### GENERAL INFORMATION

#### Food contact information

Based on supplier information the components of the adhesive conform to the compositional requirements of F&DA 175.105 for indirect food contact. Additional to this compliance there should also be a functional barrier between adhesive and the food. Such functional barrier and determination of suitability are the responsibility of the customer.

### AVAILABLE FORMATS

Widths: 3mm, 6mm, 9mm, 12mm, 25mm, 50mm  
Lengths: 10m, 25m, 50m

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

#### **MVQ SILICONES GMBH**

Industriepark Hertzstrasse, Hertzstrasse 11, D-69469 Weinheim, Deutschland, Tel 0049 6201 259040, Fax 0049 6201 2590410  
E-Mail: [info@mvq-silicones.de](mailto:info@mvq-silicones.de), Website: [www.mvq-silicones.de](http://www.mvq-silicones.de), Registered in Germany No. HRB 701069  
Director: K Soudah

# TECHNICAL DATA SHEET

## DOUBLE SIDED TISSUE TAPE

### PSA 150 FDA



#### **TYPICAL APPLICATIONS**

Applications where FDA is needed.

#### **MECHANICAL PROPERTIES**

LINER	white siliconised release paper
CARRIER	Translucent PET/Polyester
ADHESIVE	Acrylic based
TOTAL THICKNESS	0,08mm

#### **GENERAL CHARACTERISTICS**

ADHESION	DIN EN 1939	10 N/25mm
SHELF LIFE	Recommended 12 months from supply	

#### **ADDITIONAL INFORMATION**

This adhesive backing is generally described as a fixing aid rather than a permanent fixing. However, customers are advised to test suitability for their specific applications.

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

#### **MVQ SILICONES GMBH**

Industriepark Hertzstrasse, Hertzstrasse 11, D-69469 Weinheim, Deutschland, Tel 0049 6201 259040, Fax 0049 6201 2590410

E-Mail: [info@mvq-silicones.de](mailto:info@mvq-silicones.de), Website: [www.mvq-silicones.de](http://www.mvq-silicones.de), Registered in Germany No. HRB 701069

Director: K Soudah