

TECHNICAL DATA SHEET

DOUBLE SIDED TISSUE TAPE

S-4210 VS/PSA 200



MATERIAL


High temperature acrylic tissue tape on a yellow release liner

AVAILABLE GRADE

ATP S-4210 VS / PSA200

TEMPERATURE

Temperature Range

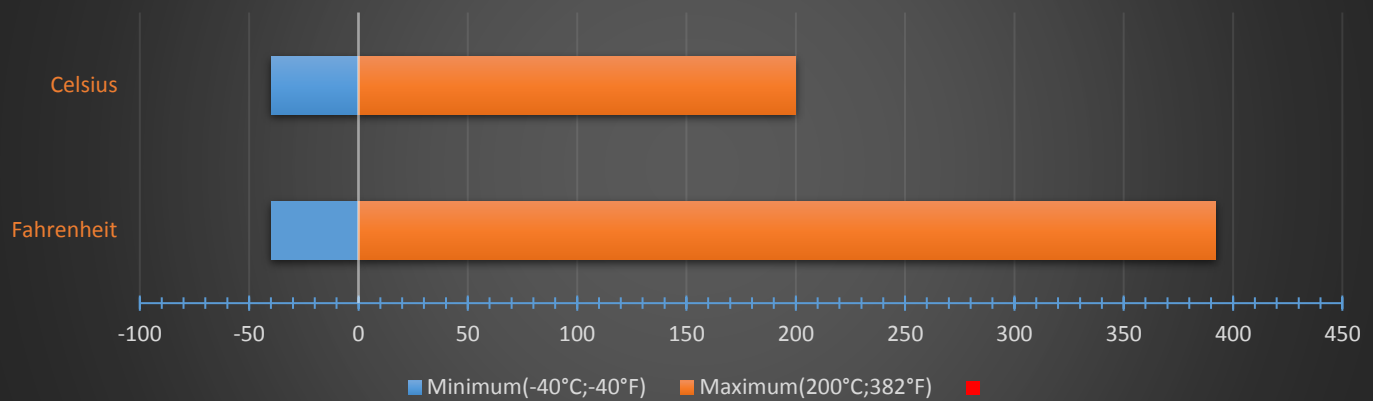

Recommended application temperature: 5°C (41°F) to 60°C (140°F)

GENERAL INFORMATION

The VS-adhesive is a modified polyacrylic showing good adhesive properties including initial and long term adhesion with excellent shear resistance. VS-adhesive exhibits good plasticiser resistance when bonded to a variety of plasticised substrates. The adhesive is optimised for ageing resistance and is especially useful where good heat resistance is required.

AVAILABLE FORMATS

Widths: 1000mm (other widths might be available on request).
Lengths: 100m

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

MVQ SILICONES GMBH

Industriepark Hertzstrasse, Hertzstrasse 11, D-69469 Weinheim, Deutschland, Tel 0049 6201 259040, Fax 0049 6201 2590410

E-Mail: info@mvq-silicones.de, Website: www.mvq-silicones.de, Registered in Germany No. HRB 701069

Director: K Soudah

TECHNICAL DATA SHEET

DOUBLE SIDED TISSUE TAPE

S-4210 VS/PSA 200



TYPICAL APPLICATIONS

High temperature applications on or in combination with high temperature materials.

MECHANICAL PROPERTIES

LINER	90g yellow siliconised release paper
CARRIER	12g non woven tissue
ADHESIVE	Polyacrylic both sides
TOTAL THICKNESS	0,1 mm

GENERAL CHARACTERISTICS

ADHESIVE STRENGTH	AFERA 5001	Min. 13N/25mm after 1h contact time
SHELF LIFE	Recommended 12 months from supply	

ADDITIONAL INFORMATION

This adhesive backing is generally described as a fixing aid rather than a permanent fixing. However, customers are advised to test suitability for their specific applications.

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

MVQ SILICONES GMBH

Industriepark Hertzstrasse, Hertzstrasse 11, D-69469 Weinheim, Deutschland, Tel 0049 6201 259040, Fax 0049 6201 2590410

E-Mail: info@mvq-silicones.de, Website: www.mvq-silicones.de, Registered in Germany No. HRB 701069

Director: K Soudah